



Features & Benefits

- Produced to consistently high quality
- Manufactured from grade GG25 fine-grain cast iron - high resistance to wear, giving extended life
- Anodized finish improves grip allowing increased power transmission
- Statically balanced to 40 m/sec. (Q6.3 balance spec giving smoother vibration free running)
- Larger pulleys, weighing in excess of 100kg are dynamically balanced
- Pulley groove specification conforms to ISO4183. Suitable for both classical and wedge belts
- Consistent high quality, branded POWERDRIVE product

TAPER BUSH V-BELT PULLEYS - CONFIGURATION

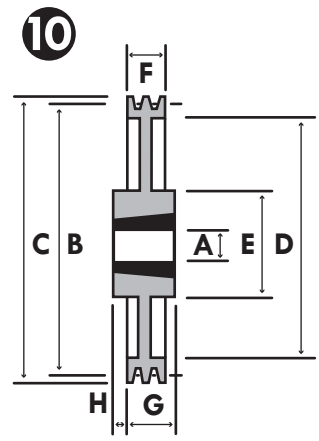
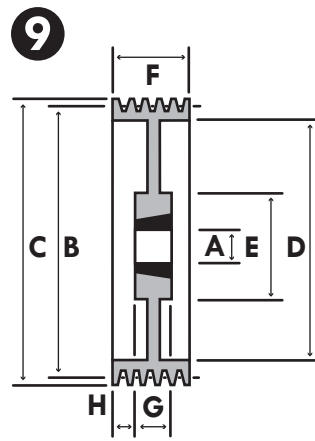
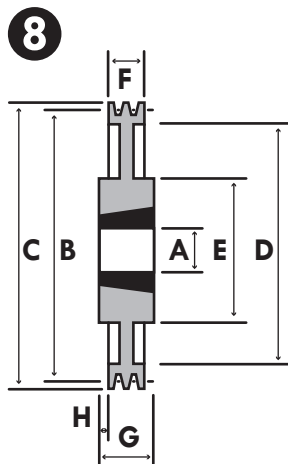
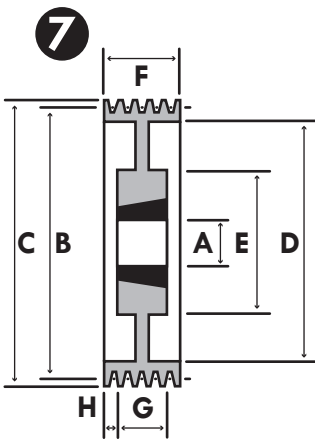
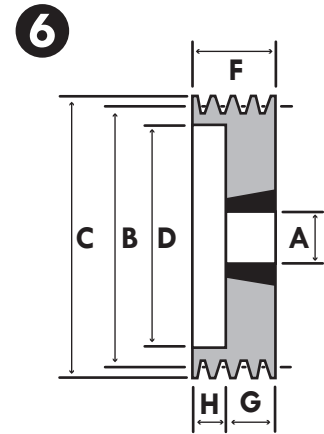
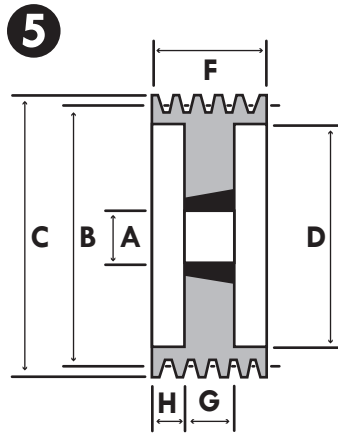
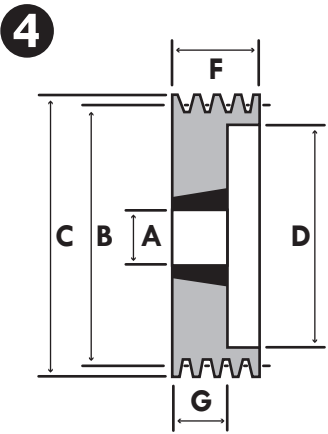
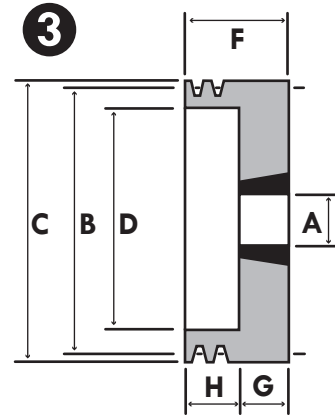
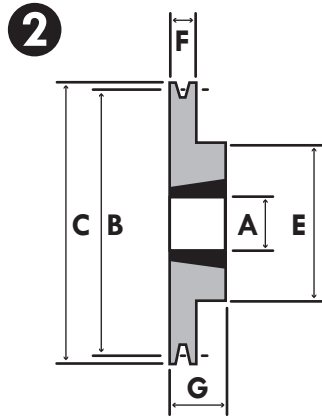
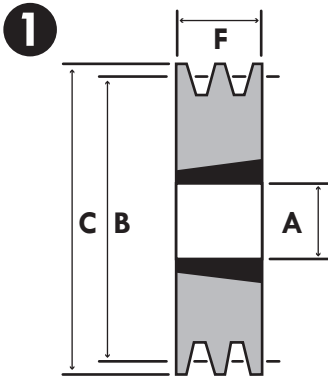


TABLE KEY

A	Inner Bore Diameter Max	F	Overall Sheave Depth
B	Pitch Diameter	G	Bush Seat Length
C	Overall Outer Diameter	H	Inner Recess Length
D	Inner Recess Diameter	Z	Number of Grooves
E	Outer Hub Diameter		

TAPER BUSH V-BELT PULLEYS “SPZ” SECTION

Part No	B	Z	Bush No	E	A Max	G	Pulley Type	D	H	C	Weight (KG)	F
SPZ 056/1	56	1	1008		25	37	3			60.6	0.5	16
SPZ 056/2	56	2	1008		28	22	3	27	35	60.6	0.56	28
SPZ 060/1	60	1	1008		25	22	3			64.6	0.32	16
SPZ 060/2	60	2	1108		28	22	3	27	35	64.6	0.7	28
SPZ 063/1	63	1	1108	62	28	22	2			67.6	0.3	16
SPZ063/2	63	2	1108		28	28	1			67.6	0.3	28
SPZ 063/3	63	3	1108		28	22	6	18	38	67.6	0.5	40
SPZ 063/4	63	4	1108	62	28	22	6	30	38	67.6	0.6	52
SPZ 067/1	67	1	1108		28	22	2			71.6	0.3	16
SPZ 067/1	67	2	1108		28	22	1			71.6	0.4	28
SPZ 067/3	67	3	1108		28	22	6	18	38	71.6	0.6	40
SPZ 067/4	67	4	1108		28	22	6	30	41	71.6	0.7	52
SPZ 071/1	71	1	1108	62	28	22	2			75.6	0.4	16
SPZ 071/2	71	2	1108		28	28	1			75.6	0.5	28
SPZ 071/3	71	3	1108		28	22	6	18	42	75.6	0.6	40
SPZ 071/4	71	4	1108		28	22	6	30	45	75.6	0.8	52
SPZ 075/1	75	1	1108	62	28	22	2			79.6	0.4	16
SPZ 075/2	75	2	1210		32	28	1			79.6	0.6	28
SPZ 075/3	75	3	1210		32	25	6	15	48	79.6	0.6	40
SPZ 075/4	75	4	1210		32	25	6	27	49	79.6	0.8	52
SPZ 080/1	80	1	1210	75	32	25	2			84.6	0.5	16
SPZ 080/2	80	2	1210		32	28	1			84.6	0.6	28
SPZ 080/3	80	3	1210		32	25	6	15	52	84.6	0.8	40
SPZ 080/4	80	4	1210		32	25	6	27	51	84.6	0.9	52
SPZ 085/1	85	1	1210	86	32	25	2			89.6	0.6	16
SPZ 085/2	85	2	1610		42	28	1			89.6	0.7	28
SPZ 085/3	85	3	1610		42	25	6	15	57	89.6	0.8	40
SPZ 085/4	85	4	1610		42	25	6	27	56	89.6	0.9	52
SPZ 085/5	85	5	1610		42	25	6	39	56	89.6	1.3	64
SPZ 090/1	90	1	1210	86	32	25	2			94.6	0.7	16
SPZ 090/2	90	2	1610		42	28	1			94.6	0.7	28
SPZ 090/3	90	3	1610		42	25	6	15	62	94.6	0.9	40
SPZ 090/4	90	4	1610		42	25	6	27	61	94.6	1.1	52
SPZ 090/5	90	5	1610		42	25	6	39	61	94.6	1.4	64
SPZ 095/1	95	1	1210	86	32	25	2			99.6	0.8	16
SPZ 095/2	95	2	1610		42	28	1			99.6	0.8	28
SPZ 095/3	95	3	1610		42	25	6	15	67	99.6	1.1	40
SPZ 095/4	95	4	1610		42	25	6	27	66	99.6	1.3	52
SPZ 095/5	95	5	1610		42	25	6	39	66	99.6	1.6	64
SPZ 100/1	100	1	1210	86	32	25	2			104.6	0.8	16
SPZ 100/2	100	2	1610		42	28	1			104.6	1	28
SPZ 100/3	100	3	1610		42	25	6	15	72	104.6	1.2	40
SPZ 100/4	100	4	1610		42	25	6	27	74	104.6	1.4	52
SPZ 100/5	100	5	2012		50	32	6	32	71	104.6	1.6	64
SPZ 100/6	100	6	2012		50	32	6	44	71	104.6	1.9	76
SPZ 106/1	106	1	1610	92	42	25	2			110.6	0.9	16
SPZ 106/2	106	2	1610		42	28	1			110.6	1.2	28
SPZ 106/3	106	3	1610		42	25	6	15	78	110.6	1.4	40
SPZ 106/4	106	4	1610		42	25	6	27	80	110.6	1.6	64
SPZ 106/5	106	5	2012		50	32	6	32	77	110.6	1.9	64
SPZ 106/6	106	6	2012		50	32	6	44	77	110.6	2.2	76
SPZ 112/1	112	1	1610	92	42	25	2			116.6	1	16
SPZ 112/2	112	2	1610		42	28	1			116.6	1.4	28
SPZ 112/3	112	3	2012		50	32	6	8	84	116.6	1.5	40
SPZ 112/4	112	4	2012		50	32	6	20	86	116.6	1.7	52
SPZ 112/5	112	5	2012		50	32	6	32	83	116.6	2.2	64
SPZ 112/6	112	6	2012		50	32	6	44	83	116.6	2.5	76
SPZ 118/1	118	1	1610	92	42	25	2			122.6	1.1	16
SPZ 118/2	118	2	1610		42	28	1			122.6	1.6	28
SPZ 118/3	118	3	2012		50	32	6	8	90	122.6	1.7	40
SPZ 118/4	118	4	2012		50	32	4	0	92	122.6	2	52
SPZ 118/5	118	5	2012		50	32	6	32	89	122.6	2.3	64
SPZ 118/6	118	6	2517		60	45	6	31	89	122.6	2.5	76
SPZ 125/1	125	1	1610	92	42	25	2			129.6	1.2	16

Part No	B	Z	Bush No	E	A Max	G	Pulley Type	D	H	C	Weight (KG)	F
SPZ 125/2	125	2	1610		42	28	1			129.6	1.6	28
SPZ 125/3	125	3	2012		50	32	6	8	97	129.6	2.1	40
SPZ 125/4	125	4	2012		50	32	4	0	99	129.6	2.3	52
SPZ 125/5	125	5	2012		50	32	6	32	96	129.6	2.7	64
SPZ 125/6	125	6	2517		60	45	6	31	96	129.6	3	76
SPZ 132/1	132	1	1610	92	42	25	2			136.6	1.4	16
SPZ 132/2	132	2	1610		42	28	1			136.6	2.1	28
SPZ 132/3	132	3	2012		50	32	6	8	104	136.6	2.4	40
SPZ 132/4	132	4	2012		50	32	6	20	104	136.6	2.7	52
SPZ 132/5	132	5	2517		60	45	6	19	103	136.6	3.2	64
SPZ 132/6	132	6	2517		60	45	6	31	103	136.6	3.5	76
SPZ 140/1	140	1	1610	92	42	25	2			144.6	1.6	16
SPZ 140/2	140	2	1610		42	28	1			144.6	2.4	28
SPZ 140/3	140	3	2012		50	32	4		112	144.6	2.8	40
SPZ 140/4	140	4	2012		50	32	4		1125	144.6	3.2	52
SPZ 140/5	140	5	2517		60	45	4		111	144.6	3.5	64
SPZ 140/6	140	6	2517		60	45	4		111	144.6	3.9	76
SPZ 150/1	150	1	1610	92	42	25	2			154.6	1.9	16
SPZ 150/2	150	2	2012		50	32	8	0	129	154.6	2.6	28
SPZ 150/3	150	3	2012		50	32	4		122	154.6	3.4	40
SPZ 150/4	150	4	2517		60	45	4		122	154.6	3.9	52
SPZ 150/5	150	5	2517		60	45	4		121	154.6	4.3	64
SPZ 150/6	150	6	2517		60	45	4		121	154.6	4.7	76
SPZ 160/1	160	1	1610	92	42	25	2			164.6	2.1	16
SPZ 160/2	160	2	2012		50	32	8	0	139	164.6	3.1	28
SPZ 160/3	160	3	2012		50	32	4		132	164.6	3.9	40
SPZ 160/4	160	4	2517		60	45	4		132	164.6	4.7	52
SPZ 160/5	160	5	2517		60	45	4		131	164.6	5.1	64
SPZ 160/6	160	6	2517		60	45	4		131	164.6	5.5	76
SPZ 180/1	180	1	1610	92	42	25	8	0	152	184.6	1.8	16
SPZ 180/2	180	2	2012	105	50	32	8	0	152	184.6	2.7	28
SPZ 180/3	180	3	2012	105	50	32	7	0	152	184.6	3.3	40
SPZ 180/4	180	4	2517		60	45	4		152	184.6	6.5	52
SPZ 180/5	180	5	2517		60	45	4		151	184.6	6.9	64
SPZ 180/6	180	6	2517		60	45	4		151	184.6	7.3	76
SPZ 200/1	200	1	2012	105	50	32	8	0	172	204.6	3.2	16
SPZ 200/2	200	2	2012	105	50	32	8	0	172	204.6	3.1	28
SPZ 200/3	200	3	2012	105	50	32	7	0	172	204.6	3.6	40
SPZ 200/4	200	4	2517	120	60	45	7	4	172	204.6	5.4	52
SPZ 200/5	200	5	2517	125	60	45	5	10	171	204.6	6.1	64
SPZ 200/6	200	6	2517	125	60	45	5	16	171	204.6	6.6	76
SPZ 224/1	224	1	2012	105	50	32	8	0	195	228.6	2.8	16
SPZ 224/2	224	2	2012	105	50	32	8	0	195	228.6	3.4	28
SPZ 224/3	224	3	2012	105	60	32	7	4	195	228.6	4.2	40
SPZ 224/4	224	4	2517	120	60	45	7	3.5	195	228.6	6.1	52
SPZ 224/5	224	5	2517	120	60	45	7	9.5	195	228.6	7.1	64
SPZ 224/6	224	6	2012	120	50	45	7	16	195	228.6	7.6	76
SPZ 250/1	250	1	2012	105	50	32	8	0	221	254.6	3.2	16
SPZ 250/2	250	2	2012	105	50	32	8	0	221	254.6	3.9	28
SPZ 250/3	250	3	2517	105	50	32	7	4	221	254.6	4.7	40
SPZ 250/4	250	4	2517	120	60	45	7	3.5	221	254.6	6.8	52
SPZ 250/5	250	5	2517	120	60	45	7	9.5	221	254.6	8.1	64
SPZ 280/1	280	1	2012	105	50	32	8	8	251	284.6	4.6	16
SPZ 280/2	280	2	2012	105	50	32	8	0	251	284.6	4.9	28
SPZ 280/3	280	3	2517	120	60	45	8	0	251	284.6	7.1	40
SPZ 280/4	280	4	2517	120	60	45	7	3.5	251	284.6	8.2	52
SPZ 280/5	280	6	2517	120	60	45	7	9.5	251	284.6	10.51	64
SPZ 315/1	315	1	2012	105	50	32	8	8	286	319.6	5.8	16
SPZ 315/2	315	2	2012	105	50	32	8	0	286	319.6	5.9	28
SPZ 315/3	315	3	2517	120	60	45	8	0	286	319.6	7.5	40
SPZ 315/4	315	4	2517	120	60	45	7	3.5	286	319.6	9.3	52
SPZ 315/5	315	5	2517	120	60	45	7	9.5	286	31.6	11	64
SPZ 355/2	355	2	2012	120	50	32	10	2	326	359.6	6.5	28
SPZ 355/3	355	3	2517	120	60	45	10	2.5	326	359.6	8.9	40
SPZ 355/4	355	4	2517	120	60	45	9	3.5	326	359.6	9.5	52
SPZ 400/2	400	2	2517	120	60	45	10	0	371	404.6	9.75	28
SPZ 400/3	400	3	2517	120	60	45	10	0	371	404.6	10.5	40
SPZ 400/4	400	4	2517	120	60	45	9	3.5	371	404.6	12.1	52

Part No	B	Z	Bush No	E	A Max	G	Pulley Type	D	H	C	Weight (KG)	F
SPZ 450/2	450	2	2517	125	60	45	10	8.5	421	454.6	10.9	28
SPZ 450/3	450	3	2517	125	60	51	10	2.5	421	454.6	13.4	40
SPZ 450/4	450	4	3020	155	75	51	9	0.5	421	454.6	16.7	52
SPZ 450/5	450	5	3020	155	75	51	9	6.5	421	454.6	16.85	64
SPZ 500/2	500	2	2517	124	60	45	10	8.5	421	504.6	15.6	28
SPZ 500/3	500	3	2517	124	60	51	10	2.5	471	504.6	18.75	40
SPZ 500/4	500	4	3020	159	75	51	9	0.5	471	506.2	20.55	52
SPZ 500/5	500	5	3030	146	75	76	10	6	471	504.6	23.45	64
SPZ 630/4	630	4	3030	155	75	76	10	12	601	634.6	22.1	52

TAPER BUSH V-BELT PULLEYS "SPA" SECTION

Part No	B	Z	Bush No	E	A Max	G	Pulley Type	D	H	C	Weight (KG)	F
SPA 067/1	67	1	1108	60	28	22				73.2	0.35	20
SPA 067/2	67	2	1108		28	22	6	13	37	73.2	0.47	35
SPA 071/1	71	1	1108	60	28	22	2			77.2	0.37	20
SPA 071/2	71	2	1108		28	22	6	13	40	77.2	0.54	35
SPA 071/3	71	3	1108		28	22	6	28	40	77.2	0.74	50
SPA 075/1	75	1	1108	60	28	22	2			81.2	0.44	20
SPA 075/2	75	2	1108		28	22	6	13	44	81.2	0.65	35
SPA 075/3	75	3	1108		28	22	6	28	44	81.2	0.84	50
SPA 080/1	80	1	1210	84	32	25	2			86.2	0.53	20
SPA 080/2	80	2	1210		32	25	6	10	50	86.2	0.62	35
SPA 080/3	80	3	1210		32	25	6	25	50	86.2	0.82	50
SPA 085/1	85	1	1210	88	32	25	2			91.2	0.68	20
SPA 085/2	85	2	1210		32	25	6	10	57	91.2	0.73	35
SPA 085/3	85	3	1210		32	25	6	25	55	91.2	0.96	50
SPA 090/1	90	1	1210	90	32	25	2			96.2	0.8	20
SPA 090/2	90	2	1610		42	25	6	10	60	96.2	0.8	35
SPA 090/3	90	3	1610		42	25	6	25	56	96.2	1.1	50
SPA 090/4	90	4	1615		42	38	6	27	56	96.2	1.4	65
SPA 090/5	90	5	1615		42	38	6	42	58	96.2	1.61	80
SPA 095/1	95	1	1210	90	32	25	2			101.2	0.9	20
SPA 095/2	95	2	1610		42	25	6	10	61	101.2	0.9	35
SPA 095/3	95	3	1610		42	25	6	25	61	101.2	1.3	50
SPA 095/4	95	4	1615		42	38	6	27	61	101.2	1.7	65
SPA 095/5	95	5	1615		42	38	6	42	63	101.2	1.83	80
SPA 100/1	100	1	1610	92	42	25	2			106.2	0.9	20
SPA 100/2	100	2	1610		42	25	6	10	66	106.2	1.1	35
SPA 100/3	100	3	1610		42	25	6	25	66	106.2	1.4	50
SPA 100/4	100	4	1615		42	38	6	27	66	106.2	1.9	65
SPA 100/5	100	5	1610		42	25	5	15	69	106.2	1.9	80
SPA 100/6	100	6	1610		42	25	5	30	69	106.2	2.23	95
SPA 106/1	106	1	1610	85	42	25	8	0	88	112.2	0.9	20
SPA 106/2	106	2	1610		42	25	6	10	72	112.2	1.3	35
SPA 106/3	106	3	1610		42	25	6	25	72	112.2	1.6	50
SPA 106/4	106	4	2012		50	32	6	33	72	112.2	1.7	65
SPA 106/5	106	5	2012		50	32	6	48	71	112.2	2.01	80
SPA 106/6	106	6	2012		50	32	6	63	71	112.2	2.53	95
SPA 112/1	112	1	1610	90	42	25	8	0	90.4	118	1	20
SPA 112/2	112	2	1610		42	25	6	10	77.6	118	1.5	35
SPA 112/3	112	3	2012		50	32	6	18	77.6	118	1.7	50
SPA 112/4	112	4	2012		50	32	6	33	77.6	118	2.1	65
SPA 112/5	112	5	2012		50	32	6	48	77	118	2.33	80
SPA 112/6	112	6	2012		50	32	6	63	77	118	2.85	95
SPA 118/1	118	1	1610	92	42	25	8	0	96.4	124	1.1	20
SPA 118/2	118	2	1610		42	25	6	10	83.6	124	1.4	35
SPA 118/3	118	3	2012		50	32	6	18	83.6	124	2	50
SPA 118/4	118	4	2012		50	32	6	33	83.6	124	2.4	65
SPA 118/5	118	5	2012		50	32	4	0	84	124	2.75	80
SPA 118/6	118	6	2012		50	32	6	63	84	124	3.13	95
SPA 125/1	125	1	1610	92	42	25	8	0	105.5	131	1.3	20
SPA 125/2	125	2	1610		42	25	4		90	131	1.9	35
SPA 125/3	125	3	2012		50	32	4		90.6	131	2.4	50
SPA 125/4	125	4	2012		50	32	4		90.6	131	2.8	65
SPA 125/5	125	5	2012		50	32	5	24	93	131	3.15	80

Part No	B	Z	Bush No	E	A Max	G	Pulley Type	D	H	C	Weight (KG)	F
SPA 125/6	125	6	2012		50	32	5	32	90	131	3.68	95
SPA 132/1	132	1	1610	92	42	25	8	0	112.5	138	1.5	20
SPA 132/2	132	2	2012		50	32	4		96	138	2	35
SPA 132/3	132	3	2012		50	32	4		97.6	138	2.7	50
SPA 132/4	132	4	2517		60	45	4		97.6	138	3	65
SPA 132/5	132	5	2517		60	45	5	18	102	138	3.25	80
SPA 132/6	132	6	2517		60	45	5	25	102	138	3.59	95
SPA 140/1	140	1	1610	92	42	25	8	0	120.5	146	1.7	20
SPA 140/2	140	2	2012		50	35	1			146	2.7	35
SPA 140/3	140	3	2517		60	45	4		105.6	146	3	50
SPA 140/4	140	4	2517		60	45	4		105.6	146	3.6	65
SPA 140/5	140	5	2517		60	45	5	18	108	146	3.95	80
SPA 140/6	140	6	2517		60	45	5	25	105	146	4.5	95
SPA 150/1	150	1	1610	92	42	25	8	0	130.5	156	1.9	20
SPA 150/2	150	2	2012		50	35	1			156	3.2	35
SPA 150/3	150	3	2517		60	45	4		115.6	156	3.8	50
SPA 150/4	150	4	2517		60	45	4		115.6	156	4.4	65
SPA 150/5	150	5	2517		60	45	5	18	118	156	4.65	80
SPA 150/6	150	6	2517		60	45	5	25	115	156	5.35	95
SPA 160/1	160	1	1610	92	42	25	8	0	140.5	166.2	2.2	20
SPA 160/2	160	2	2012		50	35	1			166.2	3.8	35
SPA 160/3	160	3	2517		60	45	4		125.6	166.2	4.6	50
SPA 160/4	160	4	2517		60	45	4		125.6	166.2	5.2	65
SPA 160/5	160	5	2517		60	45	5	17.5	128	166.2	5.56	80
SPA 160/6	160	6	2517		60	45	5	25	125	166.2	6.22	95
SPA 170/1	170	1	1610	92	42	25	8	0	150.5	176.2	2.66	20
SPA 170/2	170	2	2012		50	35	1			176.2	4.46	35
SPA 170/3	170	3	2517		60	45	4		136.6	176.2	5.25	50
SPA 170/4	170	4	2517		60	45	4		136.6	176.2	5.76	65
SPA 170/5	170	5	2517		60	45	5	17.5	136	176.2	6.43	80
SPA 170/6	170	6	2517	92	60	45	5	25	135	176.2	7.14	95
SPA 180/1	180	1	1610		42	25	8	0	145.6	186.2	2.1	20
SPA 180/2	180	2	2012		50	35	1			186.2	5.1	35
SPA 180/3	180	3	2517		60	45	4		145.6	186.2	6.3	50
SPA 180/4	180	4	2517		60	45	4		145.6	186.2	7	65
SPA 180/5	180	5	3020		75	51	5	14.5	148	186.2	6.81	80
SPA 180/6	180	6	3020		75	51	5	22	145	186.2	6.65	95
SPA 190/1	190	1	1610	92	42	25	8	0	155.6	196.2	2.31	20
SPA 190/2	190	2	2012	105	50	32	7	0	155.6	196.2	3.68	35
SPA 190/3	190	3	2517		60	45	4		155.6	196.2	7.1	50
SPA 190/4	190	4	2517		60	45	4		155.6	196.2	7.95	65
SPA 190/5	190	5	3020		75	51	4		156	196.2	7.76	80
SPA 200/1	200	1	2012	105	50	32	8	0	165.6	206.2	2.8	20
SPA 200/2	200	2	2517	120	60	45	8	0	165.6	206.2	4.7	35
SPA 200/3	200	3	2517	120	60	45	7	0	165.6	206.2	5.6	50
SPA 200/4	200	4	3020		75	51	4		165.6	206.2	8.5	65
SPA 200/5	200	5	3020		75	51	5	14.5	168	206.2	8.96	80
SPA 200/6	200	6	3020		75	51	5	22	165	206.2	10	95
SPA 212/1	212	1	2012	105	50	32	8	0	178	218.2	3.85	20
SPA 212/2	212	2	2517	120	60	45	8	0	178	218.2	6.05	35
SPA 212/3	212	3	2517	120	60	45	7	2.5	178	218.2	6.9	50
SPA 212/4	212	4	3020		75	51	4		178	218.2	9.53	65
SPA 212/5	212	5	3020		75	51	4		178	218.2	10.34	80
SPA 212/6	212	6	3020		75	51	5	22	178	218.2	11.16	95
SPA 224/1	224	1	2012	105	50	32	8	0	190	230.2	4.02	20
SPA 224/2	224	2	2517	120	60	45	8	0	190	230.2	6.65	35
SPA 224/3	224	3	2517	120	60	45	7	205	190	230.2	7.45	50
SPA 224/4	224	4	3020		75	51	4		190	230.2	11.34	65
SPA 224/5	224	5	3020		75	51	4		189	230.2	12.3	80
SPA 224/6	224	6	3020		75	51	5	22	189	230.2	12.91	95
SPA 236/1	236	1	2012	105	50	32	8	0	202	242.2	4.6	20
SPA 236/2	236	2	2517	120	60	45	8	0	202	242.2	7.3	35
SPA 236/3	236	3	2517	120	60	45	7	2.5	2.2	242.2	8.2	50
SPA 236/4	236	4	3020	155	75	51	7	7	202	242.2	8.85	65
SPA 236/5	236	5	3020	155	75	51	7	14.5	202	242.2	9.69	80
SPA 236/6	236	6	3020	155	75	51	7	22	202	242.2	10.61	95
SPA 250/1	250	1	2012	105	50	32	8	0	216	256.2	4.74	20
SPA 250/2	250	2	2517	120	60	45	8	0	216	256.2	6.58	35
SPA 250/3	250	3	2517	120	60	45	7	2.5	216	256.2	7.91	50

Part No	B	Z	Bush No	E	A Max	G	Pulley Type	D	H	C	Weight (KG)	F
SPA 250/3	250	3	2517	120	60	45	7	2.5	216	256.2	7.91	50
SPA 250/4	250	4	3020	155	75	51	7	7	216	256.2	10.25	65
SPA 250/5	250	5	3020	155	75	51	7	14.5	215	256.2	17.32	80
SPA 250/6	250	6	3020	155	75	51	7	22	215	256.2	12.87	95
SPA 280/1	280	1	2012	105	50	32	8	0	245	286.2	5.84	20
SPA 280/2	280	2	2517	120	60	45	8	0	246	286.2	8.26	35
SPA 280/3	280	3	2517	120	60	45	7	5	246	286.2	8.28	50
SPA 280/4	280	4	3020	155	75	51	7	7	246	286.2	11.36	65
SPA 280/5	280	5	3525	175	90	89	7	0	245	286.2	17.2	80
SPA 280/6	280	6	3525	175	90	65	7	3	245	286.2	17.6	95
SPA 300/1	300	1	2012	105	50	32	8	0	265	306.2	6.015	20
SPA 300/2	300	2	2517	120	60	45	8	0	266	306.2	9.45	35
SPA 300/3	300	3	3020	155	75	51	8	0	266	306.2	11.35	50
SPA 300/4	300	4	3020	155	75	51	7	7	266	306.2	12.95	65
SPA 300/5	300	5	3535	175	90	89	8	0	265	306.2	24.15	80
SPA 300/6	300	6	3535	175	90	89	7	3	284	306.2	23.3	95
SPA 315/1	315	1	2012	105	50	32	8	0	281	321.2	7.81	20
SPA 315/2	315	2	2517	120	60	45	8	0	281	321.2	10	35
SPA 315/3	315	3	3020	155	75	51	8	0	281	321.1	12.26	50
SPA 315/4	315	4	3020	155	75	51	7	7	280	321.2	13.65	65
SPA 315/5	315	5	3525	175	90	65	8	0	280	321.2	19.32	80
SPA 315/6	315	6	3525	175	90	65	7	3	320	321.2	19.61	95
SPA 355/1	355	1	2012	105	50	32	10	0	320	361.2	6.8	20
SPA 355/2	355	2	2517	120	60	45	10	0	320	361.2	10.8	35
SPA 355/3	355	3	3020	155	75	51	10	0	320	361.2	13.45	50
SPA 355/4	355	4	3020	155	75	51	9	7	365	361.2	16.2	65
SPA 355/5	355	5	3525	175	90	65	10	0	365	361.2	21.6	80
SPA 355/6	355	6	3525	174	90	65	9	3	365	361.2	23.95	95
SPA 400/1	400	1	2012	105	50	32	10	0	365	406.2	7.5	20
SPA 400/2	400	2	2517	120	60	45	10	0	365	406.2	11.4	35
SPA 400/3	400	3	3020	155	75	51	10	0	365	406.2	14.64	50
SPA 400/4	400	4	3020	155	75	51	9	7	365	406.2	17.16	65
SPA 400/5	400	5	3525	175	90	65	10	0	365	406.2	23.43	80
SPA 400/6	400	6	3525	175	90	65	9	3	365	406.2	29.45	95
SPA 450/1	450	1	2012	105	50	32	10	0	415	456.2	7.95	20
SPA 450/2	450	2	2517	120	60	45	10	0	415	456.2	14.5	35
SPA 450/3	450	3	3020	155	75	51	10	0	415	456.2	20.1	50
SPA 450/4	450	4	3020	155	75	51	9	7	415	456.2	23.35	65
SPA 450/5	450	5	3525	175	90	65	10	0	415	456.2	27.75	80
SPA 450/6	450	6	3525	175	90	65	9	3	415	456.2	29.35	95
SPA 500/2	500	2	2517	120	60	45	10	0	465	506.2	16.4	35
SPA 500/3	500	3	3020	155	75	51	10	0	465	506.2	20.01	50
SPA 500/4	500	4	3020	155	75	51	9	7	465	506.2	21.05	65
SPA 500/5	500	5	3525	175	90	65	10	0	465	506.2	23.25	80
SPA 500/6	500	6	3535	155	90	89	9	3	465	506.2	39	95
SPA 560/3	560	3	3020	175	75	51	10	0	525	566.2	22.64	50
SPA 560/4	560	4	3535	175	90	89	10	0	525	566.2	29.92	65
SPA 560/5	560	5	3535	175	90	89	10	0	525	566.2	34.22	80
SPA 560/6	560	6	3535	175	90	89	10	3	525	566.2	38.63	95
SPA 630/2	630	2	3020	155	75	51	10	0	595	636.2	21.51	35
SPA 630/3	630	3	3020	155	75	51	10	0	595	636.2	36.5	50
SPA 630/4	630	4	3525	175	90	65	10	0	595	636.2	40.6	65
SPA 630/5	630	5	3525	175	90	65	10	0	595	636.2	46.75	80
SPA 630/6	630	6	4030	210	100	65	10	3.5	595	636.2	51.9	95
SPA 800/4	800	4	3525	178	90	65	10	0	765	806.2		65
SPA 900/4	900	4	3525	178	90	65	10	0	865	906.2		65

TAPER BUSH V-BELT PULLEYS “SPB” SECTION

Part No	B	Z	Bush No	E	A Max	G	Pulley Type	D	H	C	Weight (KG)	F
SPB 100/1	100	1	1610		42		1			107.6	0.91	25
SPB 100/2	100	2	1610		42	25	6	19	60	107.6	1.25	44
SPB 100/3	100	3	1610		42	25	6	38	57	107.6	1.95	63
SPB 100/4	100	4	1610		42	25	6	57	57	107.6	2.25	82
SPB 112/1	112	1	1610		42		1			119.6	1.15	25
SPB 112/2	112	2	1610		42	25	6		69	119.6	1.68	44

Part No	B	Z	Bush No	E	A Max	G	Pulley Type	D	H	C	Weight (KG)	F
SPB 112/3	112	3	1610		42	25	6	57	69	119.6	2.25	63
SPB 112/4	112	4	1610		42	25	6		69	119.6	2.79	82
SPB 118/1	118	1	1610		42		1			125.6	1.45	25
SPB 118/2	118	2	1610		42	25	6		76	125.6	2	44
SPB 118/3	118	3	1610		42	25	6		76	125.6	2.6	63
SPB 118/4	118	4	1610		42	25	6	57	76	125.6	3.06	82
SPB 125/1	125	1	1610		42		1			132.6	1.7	25
SPB 125/2	125	2	2012		50	32	4		90	132.6	2.1	44
SPB 125/3	125	3	2012		50	32	4		90	132.6	2.44	63
SPB 125/4	125	4	2012		50	32	5	25	90	132.6	2.94	82
SPB 125/5	125	5	2012		50	32	6	69	87	132.6	3.8	101
SPB 132/1	132	1	1610		42		1			139.6	2.1	25
SPB 132/2	132	2	2012		50	32	4		89	139.6	2.37	44
SPB 132/3	132	3	2012		50	32	4		89	139.6	3.08	63
SPB 132/4	132	4	2012		50	32	5	25	89	139.6	3.9	82
SPB 132/5	132	5	2517		60	45	6	56	94	139.6	3.76	101
SPB 140/1	140	1	1610		42		1			147.6	2.16	25
SPB 140/2	140	2	2012		50	32	4		97	147.6	2.8	44
SPB 140/2	140	2	2012		50	32	4		97	147.6	2.8	44
SPB 140/3	140	3	2012		50	32	4		97	147.6	3.7	63
SPB 140/4	140	4	2517		60	45	5	19	98	147.6	4	82
SPB 140/5	140	5	2517		60	45	5	28	106	147.6	4.3	101
SPB 140/6	140	6	2517		60	45	5	38	106	147.6	5.1	120
SPB 150/1	150	1	1610		42		1		107	157.6	2.46	25
SPB 150/2	150	2	2012		50	32	4		107	157.6	3.4	44
SPB 150/3	150	3	2517		60	45	4		107	157.6	4.03	63
SPB 150/4	150	4	2517		60	45	5	19	107	157.6		82
SPB 150/5	150	5	2517		60	45	5	28	107	157.6		101
SPB 150/6	150	6	2517		60	45	5	37.5	107	157.6	6.58	120
SPB 160/1	160	1	1610		42		1			167.6	2.92	25
SPB 160/2	160	2	2012		50	32	6	12	117	167.6	3.91	44
SPB 160/3	160	3	2517		60	45	6	18	117	167.6	4.38	63
SPB 160/4	160	4	2517		60	45	5	18.5	117	167.6	5.64	82
SPB 160/5	160	5	2517		60	45	5	28	117	167.6	6.6	101
SPB 160/6	160	6	3020		75	51	5	34.5	123	167.6	6.8	120
SPB 170/1	170	1	1610		42	25	1			177.6	3.33	25
SPB 170/2	170	2	2012		50	32	6	12	127	177.6	4.53	44
SPB 170/3	170	3	2517		60	45	6	18	127	177.6	5.7	63
SPB 170/4	170	4	2517		60	45	5	18.5	127	177.6	6.65	82
SPB 170/5	170	5	3020		75	51	5	25	127	177.6	6.7	101
SPB 170/6	170	6	3020		75	51	5	34.5	127	177.6	7.6	120
SPB 180/1	180	1	1610		42	25	1			187.6	2.48	25
SPB 180/2	180	2	2517	120	60	45	2			187.6	5.6	44
SPB 180/3	180	3	2517		60	45	6	18	137	187.6	6.58	63
SPB 180/4	180	4	2517		60	45	5	18.5	137	187.6	7.61	82
SPB 180/5	180	5	3020		75	51	5	25	137	187.6	7.93	101
SPB 180/6	180	6	3030		75	51	5	34.5	137	187.6	8.92	120
SPB 180/8	180	8	3020	105	75	76	5	41	137	187.6	10.63	158
SPB 190/1	190	1	2012	120	50	32	2			197.6	4.73	25
SPB 190/2	190	2	2517		60	45	2			197.6	6.44	44
SPB 190/3	190	3	2517		60	45	6	18	147	197.6	7.56	63
SPB 190/4	190	4	2517		60	45	5	18.5	147	197.6	8.8	82
SPB 190/5	190	5	3020		75	51	5	25	147	197.6	9.05	101
SPB 190/6	190	6	3020		75	51	5	34.5	147	197.6	10.2	120
SPB 190/8	190	8	3020		75	51	5	41	151	197.6	12.2	158
SPB 200/1	200	1	2012	105	50	32	8		157	207.6	4.02	25
SPB 200/2	200	2	2517	120	60	45	2			207.6	7.49	44
SPB 200/3	200	3	2517		60	45	4		157	207.6	8.78	63
SPB 200/4	200	4	3020		75	51	4		157	207.6	9.3	82
SPB 200/5	200	5	3020		75	51	5	25	157	207.6	10.6	101
SPB 200/6	200	6	3020		75	51	5	34.5	157	207.6	11.73	120
SPB 200/8	200	8	3525		90	65	5	34.5	161	207.6	14.68	158
SPB 212/1	212	1	2012	105	50	32	8		169	219.6	4.97	25
SPB 212/2	212	2	2517	120	60	45	8		169	219.6	6.93	44
SPB 212/3	212	3	2517	120	60	45	7		169	219.6	8.21	63
SPB 212/3	212	3	2517	120	60	45	7		169	219.6	8.21	63
SPB 212/4	212	4	3020		75	51	4		169	219.6	10.86	82
SPB 212/5	212	5	3020		75	51	5	25	169	219.6	12.25	101
SPB 212/6	212	6	3525		90	65	5	15.5	169	219.6	20.65	120

Part No	B	Z	Bush No	E	A Max	G	Pulley Type	D	H	C	Weight (KG)	F
SPB 212/8	212	8	3525		90	65	5	34.5	173	219.6	17.3	158
SPB 224/1	224	1	2012	105	50	32	8		181	231.6	5.14	25
SPB 224/2	224	2	2517	120	60	45	8		181	231.6	7.68	44
SPB 224/3	224	3	2517	120	60	45	7		181	231.6	9.27	63
SPB 224/4	224	4	3020		75	51	4	25	181	231.6	12.53	82
SPB 224/5	224	5	3020		75	65	5	15.5	181	231.6	13.85	101
SPB 224/6	224	6	3525		90	65	5	34.5	181	231.6	15.26	120
SPB 224/8	224	8	3525		90	89	5	53.5	185	231.6	18.03	158
SPB 224/10	224	10	3535		90	32	5		185	231.6	21.97	196
SPB 236/1	236	1	2012	105	50	45	8		193	243.6	5.5	25
SPB 236/2	236	2	2517	120	60	45	8		193	243.6	8.75	44
SPB 236/3	236	3	2517	120	60	51	7		193	243.6	10.05	63
SPB 236/4	236	5	3020		75	65	4		193	243.6	14.8	101
SPB 236/5	236	4	3525		90	65	4	15.5	193	243.6	16.14	82
SPB 236/6	236	6	3525		90	65	5	34.5	193	243.6	19.25	120
SPB 236/8	236	8	3525		90	65	5	53.5	197	243.6	20.65	158
SPB 236/10	236	10	3535		90	89	5		197	243.6	24.93	196
SPB 250/1	250	1	2012	105	50	32	8		207	257.6	6.2	25
SPB 250/2	250	2	2517	120	60	45	8		207	257.6	8.75	44
SPB 250/3	250	3	3020	155	75	51	7		207	257.6	12.5	63
SPB 250/4	250	4	3020	155	75	51	7		207	257.6	12.6	82
SPB 250/5	250	5	3525		90	89	4		207	257.6	22.75	101
SPB 250/6	250	6	3525		90	89	5	15.5	207	257.6	24.25	120
SPB 250/8	250	8	3525		90	89	5	34.5	211	257.6	23.13	158
SPB 250/10	250	10	3535		90	89	5	53.5	211	257.6	29.52	196
SPB 280/1	280	1	2012	105	50	32	8		237	287.6	6.83	25
SPB 280/2	280	2	2517	120	60	45	8		237	287.6	9.91	44
SPB 280/3	280	3	3020	155	75	51	7	6	237	287.6	12.02	63
SPB 280/4	280	4	3020	155	75	51	7	15.5	237	287.6	13.94	82
SPB 280/5	280	5	3525	175	90	89	7	6	237	287.6	21.6	101
SPB 280/6	280	6	3525	175	90	89	7	15.5	237	287.6	23.35	120
SPB 280/8	280	8	3525	175	90	89	7	34.5	237	287.6	25.78	158
SPB 280/10	280	10	3535	175	90	89	7	53.5	237	287.6	30.5	196
SPB 315/1	315	1	2012	105	50	32	8		272	322.6	9.34	25
SPB 315/2	315	2	2517	120	60	45	8		272	322.6	12.3	44
SPB 315/3	315	3	3020	155	75	51	7	6	272	322.6	14.25	63
SPB 315/4	315	4	3525	175	90	89	8		272	322.6	21.7	82
SPB 315/5	315	5	3525	175	90	89	7	6	272	322.6	25.3	101
SPB 315/6	315	6	3525	175	90	89	7	15.5	272	322.6	24.14	120
SPB 315/8	315	8	3525	175	90	89	7	34.5	272	322.6	29.45	158
SPB 315/10	315	10	3535	175	90	89	7	53.5	272	322.6	34.75	196
SPB 355/2	355	2	3020	155	75	51	8	0	312	362.6	15.12	44
SPB 355/3	355	3	3020	15	75	51	7	6	312	362.6	17.23	63
SPB 355/4	355	4	3525	175	90	89	8	0	312	362.6	23.13	82
SPB 355/5	355	5	3525	175	90	89	7	6	312	362.6	28.87	101
SPB 355/6	355	6	3525	175	90	89	7	15.5	312	362.6	28.35	120
SPB 355/8	355	8	3525	175	90	89	7	34.5	312	362.6	34.06	158
SPB 355/10	355	10	4040	210	100	102	7	47	310	362.6	47.7	196
SPB 400/2	400	2	3020	155	75	51	8	0	357	407.6	18.73	44
SPB 400/3	400	3	3525	175	90	89	8	0	357	407.6	19.85	63
SPB 400/4	400	4	3525	175	90	89	8	0	357	407.6	26.6	82
SPB 400/5	400	5	3525	175	90	65	7	6	357	407.6	30	101
SPB 400/6	400	6	3525	175	90	65	7	15.5	357	407.6	32.12	120
SPB 400/8	400	8	3525	210	100	65	7	28	357	407.6	37.08	158
SPB 400/10	400	10	4040	210	100	102	7	47	357	407.6	54.62	196
SPB 450/2	450	2	3020	155	75	51	10	0	407	457.6	16.9	44
SPB 450/3	450	3	3525	175	90	65	10	0	407	457.6	24.95	63
SPB 450/4	450	4	3525	175	90	65	10	0	407	457.6	27	82
SPB 450/5	450	5	3525	175	90	65	9	6	407	457.6	30.64	101
SPB 450/6	450	6	3525	210	100	65	9	9	407	457.6	32.8	120
SPB 450/8	450	8	3525	210	100	65	9	28	407	457.6	42.45	158
SPB 500/2	500	2	3020	155	75	51	10	0	457	507.6	16.9	44
SPB 500/3	500	3	3525	175	90	65	10	0	457	507.6	27.55	63
SPB 500/4	500	4	3525	175	90	65	10	0	457	507.6	30	82
SPB 500/5	500	5	3525	175	90	65	9	6	457	507.6	34.3	101
SPB 500/6	500	6	3525	210	100	65	9	9	457	507.6	36.6	120
SPB 500/8	500	8	3525	210	100	65	9	28	457	507.6	52	158
SPB 560/2	560	2	3525	155	75	51	10	16	517	567.6	27.9	44
SPB 560/3	560	3	3525	175	90	65	10	0	517	567.6	39	63

Part No	B	Z	Bush No	E	A Max	G	Pulley Type	D	H	C	Weight (KG)	F
SPB 560/4	560	4	3525	175	90	65	10	0	517	567.6	40.3	82
SPB 560/5	560	5	3525	210	100	65	10	0	517	567.6	42.2	101
SPB 560/6	560	6	3525	210	100	65	9	9	517	567.6	45.9	120
SPB 560/8	560	8	4030	240	110	76	9	22	517	567.6	63.03	158
SPB 630/2	630	2	3020	155	75	51	10	16	587	637.6	28.55	44
SPB 630/3	630	3	3525	175	90	65	10	0	587	637.6	45.55	63
SPB 630/4	630	4	3525	175	90	65	10	0	587	637.6	50.2	82
SPB 630/5	630	5	3525	210	100	65	10	0	587	637.6	50.3	101
SPB 630/6	630	6	3525	210	100	65	9	9	587	637.6	54.7	120
SPB 630/8	630	8	4545	240	110	76	9	22	587	637.6	69.48	158
SPB 710/3	710	3	3535	175	90	89	10	0	664	717.6	48.56	63
SPB 710/4	710	4	3535	175	90	89	10	0	664	717.6	57.01	82
SPB 710/5	710	5	4040	210	100	102	10	0	664	717.6	71.3	101
SPB 710/6	710	6	4545	240	110	114	9	3	664	717.6	78.47	120
SPB 710/8	710	8	4545	240	110	114	9	22	664	717.6	94.48	158
SPB 800/3	800	3	3525	175	90	65	10	0	754	807.6	54.56	63
SPB 800/4	800	4	4030	210	100	76	10	0	757	807.6	62.4	82
SPB 800/5	800	5	4030	210	100	76	10	0	754	807.6	67.98	101
SPB 800/6	800	6	4535	240	110	89	9	3	754	807.6	84.35	120
SPB 800/8	800	8	4535	240	110	89	9	22	754	807.6	95.54	158

TAPER BUSH V-BELT PULLEYS "SPC" SECTION

Part No	B	Z	Bush No	E	A Max	G	Pulley Type	D	H	C	Weight (KG)	F
SPC 200/3	200	3	2517		60	45	5	20	144	210.2	10.3	85
SPC 200/4	200	4	3020		75	51	5	29.5	144	210.2	11.4	111
SPC 200/5	200	5	3525		90	65	5	23.5	144	210.2	16.1	136
SPC 200/6	200	6	3525		90	65	5	36	144	210.2	14.2	162
SPC 200/8	200	8	3525		90	65	5	62	144	210.2	18.85	213
SPC 212/3	212	3	3020		75	51	5	17	156	222.2	11.1	85
SPC 212/4	212	4	3020		75	51	5	29.5	156	222.2	13.05	111
SPC 212/5	212	5	3525		90	65	5	23.5	156	222.2	16.1	136
SPC 212/6	212	6	3525		90	65	5	36	156	222.2	20.65	162
SPC 212/8	212	8	3525		90	65	5	62	156	222.2	21.74	213
SPC 224/3	224	3	3020		75	51	5	17	173	234.2	12.7	85
SPC 224/4	224	4	3525		90	65	5	11	173	234.2	16.3	111
SPC 224/5	224	5	3525		90	65	5	23.5	168	234.2	16.66	136
SPC 224/6	224	6	3525		90	65	5	36	173	234.2	18.73	162
SPC 224/8	224	8	3525		90	65	5	62	168	234.2	24.77	213
SPC 236/3	236	3	3020		75	51	5	17	180	246.2	14.35	85
SPC 236/4	236	4	3525		90	65	5	11	184	246.2	18.87	111
SPC 236/5	236	5	3525		90	65	5	23.5	180	246.2	16.65	136
SPC 236/6	236	6	3525		90	65	5	36	184	246.2	23.16	162
SPC 236/8	236	8	3525		90	65	5	62	180	246.2	27.94	213
SPC 250/3	250	3	3020		75	51	5	17	194	260.2	16.45	85
SPC 250/4	250	4	3525		90	65	5	11	198	260.2	22.57	111
SPC 250/5	250	5	3525		90	65	5	23.5	194	260.2	22	136
SPC 250/6	250	6	3525		90	65	5	36	198	260.2	27.2	162
SPC 250/8	250	8	3525		90	65	5	62	198	260.2	31.5	213
SPC 265/3	265	3	3525	175	90	2				275.2	23.5	85
SPC 265/4	265	4	3525		90	65	5	11	209	275.2	26.2	111
SPC 265/5	265	5	3525		90	65	5	23.5	209	275.2	28.48	136
SPB 265/6	265	6	3525		90	65	5	36	209	275.2	27.55	162
SPB 265/8	265	8	3525		90	65	5	62	209	275.2	36.15	213
SPC 280/3	280	3	3525	175	90	65	2			290.2	22.85	85
SPC 280/4	280	4	3525	175	90	65	7	11	228	290.2	25.42	111
SPC 280/5	280	5	3525		90	65	5	23.5	224	290.2	28.45	136
SPC 280/6	280	6	3525	175	90	65	7	36	228	290.2	31.17	162
SPC 280/8	280	8	3525		90	65	5	62	228	290.2	39.85	213
SPC 300/3	300	3	3525	175	90	65	8	2	247	310.2	20.35	85
SPC 300.4	300	4	3525	175	90	65	7	11	244	310.2	25.55	110.5
SPC 300/5	300	5	3525	175	90	65	7	23.5	247	310.2	26.5	136
SPC 300/6	300	6	3525	175	90	65	7	36	247	310.2	31.85	161.5
SPC 300/8	300	8	3525	0	100	65	5	55	244	310.2	42.73	212.5

Part No	B	Z	Bush No	E	A Max	G	Pulley Type	D	H	C	Weight (KG)	F
SPC 315/3	315	3	3525	175	90	65	8	2	264	325.2	21.9	85
SPC 315/4	315	4	3525	175	90	65	7	11	264	325.2	25	110.5
SPC 315/5	315	5	3525	175	90	65	7	23.5	259	325.2	28.27	136
SPC 315/6	315	6	3525	175	90	65	7	36	259	325.2	31.25	161.5
SPC 315/8	315	8	3525	0	100	65	5	55	259	325.2	43.67	212.5
SPC 355/3	355	3	3525	175	90	65	8	2	304	365.2	25.82	85
SPC 355/4	355	4	3525	175	90	65	7	1	299	365.2	33	110.5
SPC 355/5	355	5	3525	175	90	65	7	23.5	304	365.2	33.85	136
SPC 355/6	355	6	3525	175	90	65	7	36	304	365.2	37.25	161.5
SPC 355/8	355	8	3525	210	100	65	7	55	304	365.2	49.3	212.5
SPC 375/3	375	3	3525	175	90	65	8	2	319	385.2	27.7	85
SPC 375/4	375	4	3525	175	90	65	7	11	324	385.2	33.5	110.5
SPC 375/5	375	5	3525	175	90	65	7	23.5	324	385.2	34.4	136
SPC 375/6	375	6	3525	210	100	65	7	30	319	385.2	39.75	161.5
SPC 375/8	375	8	4030	540	110	76	7	49	324	385.2	56.9	212.5
SPC 400/3	400	3	3525	175	90	65	8	2	344	410.2	32.52	85
SPC 400/4	400	4	3525	175	90	65	7	11	348	410.2	36.9	110.5
SPC 400/5	400	5	3525	175	90	65	7	23.5	344	410.2	37.45	136
SPC 400/6	400	6	3525	210	100	65	7	30	344	410.2	47.1	161.5
SPC 400/8	400	8	4030	240	110	76	7	49	348	410.2	61.5	212.5
SPC 425/3	425	3	3525	175	90	65	10	2	369	435.2	33.05	85
SPC 425/4	425	4	3525	175	90	65	9	11	369	435.2	37.6	110.5
SPC 425/5	425	5	3525	175	90	65	9	23.5	370	435.2	39.8	136
SPC 425/6	425	6	4535	210	100	89	9	30	370	435.2	53.1	161.5
SPC 425/8	425	8	4535	240	110	89	9	49	370	435.2	67.65	212.5
SPC 450/3	450	3	3525	175	90	65	10	2	395	460.2	34.54	85
SPC 450/4	450	4	3525	175	90	65	9	11	394	460.2	41.6	110.5
SPC 450/5	450	5	3525	210	100	65	9	17	394	460.2	48.24	136
SPC 450/6	450	6	4535	240	110	89	9	24	395	460.2	60.98	161.5
SPC 450/8	450	8	4535	265	125	89	9	43	395	460.2	81	212.5
SPC 475/3	475	3	3525	175	90	65	10	2	419	485.2	38.7	85
SPC 475/4	475	4	3525	175	90	65	9	11	419	485.2	44.2	110.5
SPC 475/5	475	5	3525	210	100	65	9	17	419	485.2	53.25	136
SPC 475/6	475	6	4535	240	110	89	9	24	419	485.2	61.3	161.5
SPC 475/8	475	8	4535	265	125	89	9	43	419	485.2	56.7	212.5
SPC 500/3	500	3	3525	175	90	65	10	2	444	510.2	41.4	85
SPC 500/4	500	4	3525	175	90	65	9	11	444	510.2	45.45	110.5
SPC 500/5	500	5	3525	210	100	65	9	17	444	510.2	55.69	136
SPC 500/6	500	6	4535	240	110	89	9	24	445	510.2	67.25	161.5
SPC 500/8	500	8	4535	265	125	89	9	43	445	510.2	87.8	212.5
SPC 530/3	530	3	3525	175	90	65	10	2	474	540.2	40.24	85
SPC 530/4	530	4	3525	210	100	65	9	4	474	540.2	50.44	110.5
SPC 530/5	530	5	4535	240	110	89	9	11	474	540.2	60.64	136
SPC 530/6	530	6	4535	265	125	89	9	17	475	540.2	71.2	161.5
SPC 530/8	530	8	4535	265	125	89	9	43	474	540.2	89.31	212.5
SPC 560/3	560	3	3525	175	90	65	10	2	504	570.2	42.5	85
SPC 560/4	560	4	3525	210	100	65	9	4	504	570.2	53.05	110.5
SPC 560/5	560	5	4535	240	110	89	9	11	505	570.2	69.11	136
SPC 560/6	560	6	4535	265	125	89	9	17	505	570.2	81.78	161.5
SPC 560/8	560	8	4535	265	125	89	9	43	505	570.2	98.4	212.5
SPC 630/3	630	3	4030	210	100	76	10	2	574	640.2	54.13	85
SPC 630/4	630	4	4030	240	110	76	10	2	574	640.2	66.14	110.5
SPC 630/5	630	5	4535	265	125	89	9	5	574	640.2	85.61	136
SPC 630/6	630	6	4535	265	125	89	9	17	574	640.2	101	161.5
SPC 630/8	630	8	4535	265	125	89	9	43	574	640.2	105.87	212.5
SPC 710/3	710	3	4040	210	100	102	9	9	654	720.2	70.71	85
SPC 710/4	710	4	4545	240	110	114	10	2	654	720.2	84.53	110.5
SPC 710/5	710	5	5050	265	125	127	9	5	654	720.2	100.11	136
SPC 710/6	710	6	5050	265	125	127	9	17	654	720.2	111.13	161.5
SPC 710/8	710	8	5050	265	125	127	9	43	654	702.2	130	212.5
SPC 800/3	800	3	4535	240	110	89	9	15	737	810.2	82.21	85
SPC 800/4	800	4	5040	265	125	89	10	8	737	810.2	107.9	110.5
SPC 800/5	800	5	5040	265	125	89	9	5	737	810.2	118.06	136
SPC 800/6	800	6	5040	265	125	89	9	17	745	810.2	136.3	161.5
SPC 800/8	800	8	5040	265	125	89	9	43	737	810.2	157.16	212.5